


GDT Product Specification

B5G***L DIP Gas Discharge Tube (Φ 5.5×6mm)



1、FEATURES

- 2-Electrode DIP Design UL Certificated E232249
- High Current Handling Capability 5,000A @ 8/20μs
- Low Capacitance and Insertion Loss
- Fast Response and Long Service Life
- Reliable to Protect Electrostatic Surge

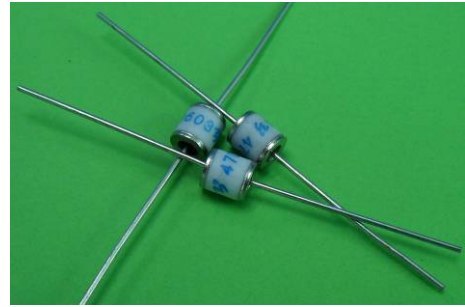

2、AVAILABLE PART NUMBER AND ELECTRICAL PARAMETER @ T=25°C RH = 45%-75%

Part Number	DC Breakdown Voltage①	Tolerance of Vs	Impulse Spark-over Voltage	Impulse Discharge Current②	Insulation Resistance		C③ (1MHz)
	100V/s④		1kV/μs④	8/20μs	GΩ	DC	0.3V _{DC}
B5G070L	70V	±25%	≤650V	5,000A	≥1	25V	≤1pF
B5G090L	90V	±25%	≤650V	5,000A	≥1	50V	≤1pF
B5G150L	150V	±25%	≤ 600V	5,000A	≥1	50V	≤1pF
B5G200L	200V	±20%	≤ 550V	5,000A	≥1	100V	≤1pF
B5G230L	230V	±20%	≤ 550V	5,000A	≥1	100V	≤1pF
B5G300L	300V	±20%	≤ 700V	5,000A	≥1	100V	≤1pF
B5G350L	350V	±20%	≤ 750V	5,000A	≥1	100V	≤1pF
B5G420L	420V	±20%	≤ 800V	5,000A	≥1	100V	≤1pF
B5G470L	470V	±20%	≤ 850V	5,000A	≥1	250V	≤1pF
B5G600L	600V	±20%	≤ 950V	5,000A	≥1	250V	≤1pF
B5G800L	800V	±20%	≤ 1200V	5,000A	≥1	250V	≤1pF
B5G1000	1000V	±20%	≤ 1400V	3,000A	≥1	250V	≤1pF
B5G1500	1500V	±20%	≤ 2500V	3,000A	≥1	250V	≤1pF
B5G2000	2000V	±20%	≤ 3000V	3,000A	≥1	250V	≤1pF
B5G2500	2500V	±20%	≤ 3500V	3,000A	≥1	250V	≤1pF
B5G3000	3000V	±20%	≤ 4000V	3,000A	≥1	250V	≤1pF
B5G3600	3600V	±20%	≤ 4700V	3,000A	≥1	250V	≤1pF
B5G4000	4000V	±20%	≤ 5500V	3,000A	≥1	250V	≤1pF
B5G4500	4500V	±20%	≤ 6000V	3,000A	≥1	250V	≤1pF
B5G5500	5500V	±20%	≤ 7500V	3,000A	≥1	250V	≤1pF


- ①、The parameters of all are tested by ITU-T K12
- ②、Total Impulse Discharge Current 5,000A @ 8/20μs by IEC 61000-4-5, 10 shots
- ③、The capacitance are tested by 1MHz @ DC= 0.3V
- ④、The V-T waveform of DCBV and IPBV must lie between the shades.

3、PART NUMBERING SYSTEM

B5G XXX L
 (1) (2) (3)

(1) Bencent 2-Electrod DIP Gas Discharge Tube :

- ①、5G-Φ5.5×6 (mm)
- ②、8G-Φ8×6 (mm)

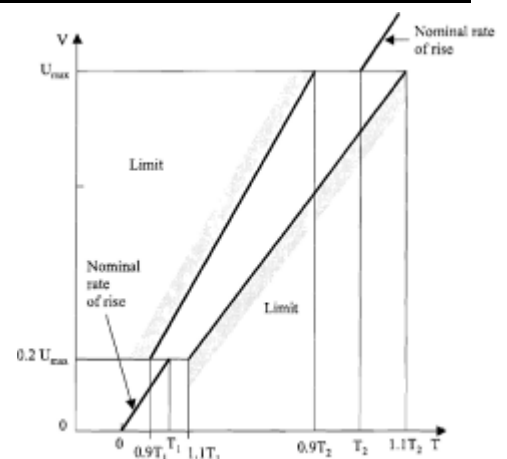

GDT Product Specification

B5G***L DIP Gas Discharge Tube (Φ 5.5×6mm)




(2) DC Breakdown Voltage, e.g., 070=70V


(3) Surge Rating @8/20 μ s, L=5KA

4、 DIMENSIONS RECOMMENDED FLOW AND MARKING

Dimensions

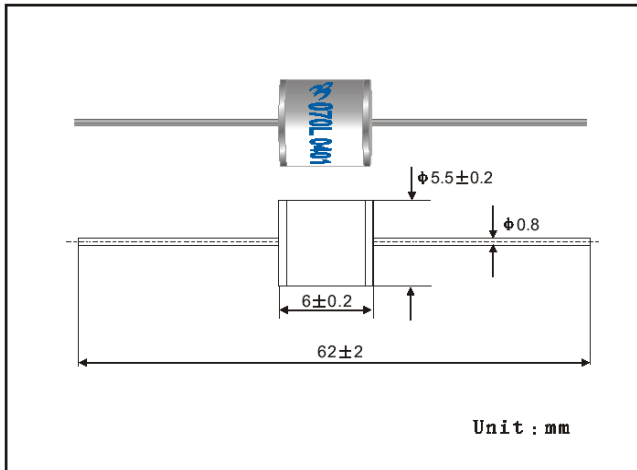

Recommended Flow

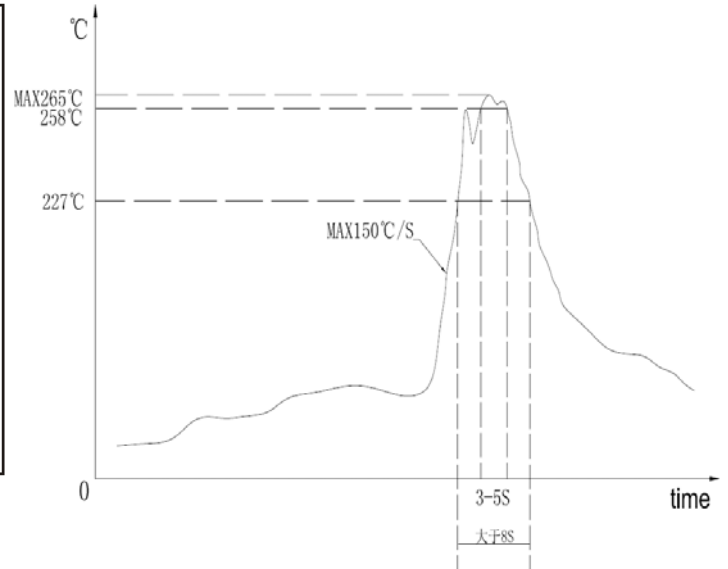

Surface Mark

070L-Part Number

0401-Production Date

04:Year 2004

01:Month 1/January

6、 PACKAGE BOX INFORMATION

OUTLINE	BOX/REEL (PCS)	INSIDE CARTON (PCS)	PER CARTON (PCS)	CARTON SIZE(mm)		
				L	W	H
BOX	100	1,000	6,000	385	355	220
TAPING	1,000	—	6,000	480	350	360

Remark:

Special Notes

- 1、 Bencent Electronics Limited (BENCENT) reserves the right to make changes without further notice to its products herein.
- 2、 BENCENT does not assumes any liability arising out of the application or usage of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.
- 3、 Any special usage must be authorized by BENCENT in advance; otherwise BENCENT does not take any liability of it.

Date Issued:2009/06